

Solar Panel Promotion

R14 a Watt excluding VAT

While stock last

Bring New Energy
to Your Life

DelSolar



D6P235A3A15A2

235Watt

Multi-Crystalline Photovoltaic Module



Positive Power Tolerance



Maximum Surface Load up to 5400 Pa
Withstand High Wind and Snow



Excellent Performance under Low Light
Environments



High Module Conversion Efficiency




Homogeneous Module Color with
DelSolar-made 3 Busbar Cells

Electrical Data

MODEL	D6P235A3A
Maximum Rating Power (Pmax)	235 W
Module Efficiency	14.4 %
Open Circuit Voltage (Voc)	36.82 V
Maximum Power Voltage (Vpm)	29.71 V
Short Circuit Current (Isc)	8.44 A
Maximum Power Current (Ipm)	7.91 A

Dependence on Temperature

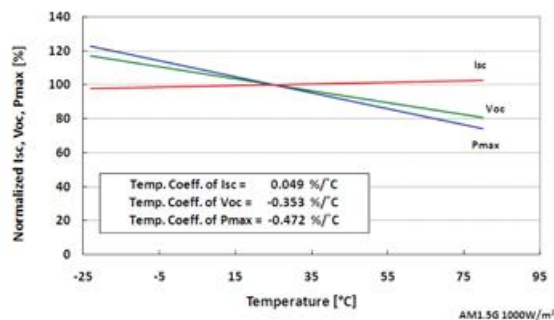

Mechanical Data

Item	Specification
Dimension	1650 mm (L) x 990 mm (W) x 42 mm (D) / 65" (L) x 39" (W) x 1.65" (D)
Weight	19.5 kg / 43.0 lbs
Solar Cell	60 multicrystalline 6" silicon cells (156 mm x 156 mm)
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP65 rated
Frame	Anodized aluminum frame, original or black

Front View & Back View

